

TECHNICAL DATA

BricoTape Double Sided Tiles & Bathrooms

Product Description

BricoTape Tiles & Bathrooms is an extra-strong double-sided instant self-adhesive tape, designed for vertical fixations of flat objects on tiles.

BricoTape Tiles & Bathrooms is especially suitable for areas with high humidity such as bathrooms, kitchens, etc. BricoTape Tiles & Bathrooms compensates slight irregularities of the surfaces.

Thanks to its "CLOSED CELL" TECHNOLOGY BricoTape Tiles & Bathrooms has a "closed microcell" structure which creates a moisture barrier that guarantees safe and long-lasting fixations.

Technical Characteristics

Finish	White	
Dimensions	Roll	1,5 m x 19 mm
Tape Thickness	1 mm	
Heat Resistance	- 5 °C to + 80 °C	
Maximum strength	24 hours	
Mechanical strength	3 cm tape / 1 kg	

Applications

Fixing decorative elements, hangers, posters, frames, mirrors, etc.

- * *Not recommended for rough or very porous supports.*
- * *Not recommended on non-stick, fragile or disintegrated surfaces.*
- * *Not recommended for vertical joints of more than 5 kg.*

Materials

- | | |
|-----------------|------------|
| ➤ Tiles | ➤ Marble |
| ➤ Stoneware | ➤ Metal |
| ➤ Ceramic tiles | ➤ Plastic* |
| ➤ Mirrors | ➤ Glass |

* *Not suitable for polyethylene (PE), polypropylene (PP), or Teflon® (PTFE).*

Instructions for use


- Surface preparation:

The surfaces to be glued must be clean and dry, free of any type of dirt, dust or grease. It is recommended to degrease the area with alcohol.

- Application:

Unwind the tape trying not to touch the adhesive area with your fingers and position it in the desired area. Paste the tape and press hard to achieve its anchor. Cut the desired belt size with a cutter or similar. Remove the blue protective film. Join both surfaces by exerting pressure.

For gluing mirrors:

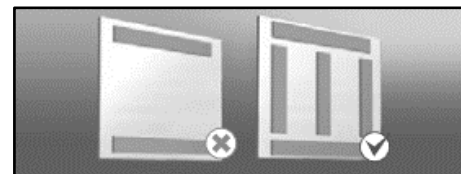

Mirror size	cm of tape
10 cm x 25 cm	25 cm
25 cm x 50 cm	105 cm
50 cm x 50 cm	210 cm

Dissolving and cleaning

If you want to remove the tape once fixed, remove the remains with acetone with the help of lever efforts.

Storage

Store the product in a cool dry place in its original container at temperatures between 5 ° C and 25 ° C. Under these indications, the product can be stored for at least 60 months.

Safety precautions

Not harmful to humans. Meets RoHS and REACH standards. Not classified under GHS.

More detailed instructions are given in the relevant product safety data sheet.

The user shall take ultimate responsibility for determining the final suitability of the product in all types of application.

The information given in this Technical Data Sheet should never be considered as a specification of the product's properties.

We guarantee the uniformity of the properties of our products in all supplies. The recommendations and information published in this technical data sheet are based on our current knowledge and rigorous laboratory tests. Due to the many variations in each project's materials and conditions, we ask our customers to conduct their own tests of utility under the expected working conditions and following our general instructions. This will avoid any subsequent damage, for the consequences of which the company is not responsible.